

Novoli 4354-55 + 4357 cabinets

Thank you for purchasing this Novoli cabinet. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.



This item is **HEAVY**



Pre-assembly preparation

Please ensure instructions are read in full before assembling this product

Please check the pack contents before assembling this product. A full checklist of components is given in this leaflet. If any components are missing, please contact the retailer from whom you bought this product.

This product is **HEAVY**, it should be assembled as near as possible to the point of use. **TAKE CARE WHEN LIFTING** to avoid personal injury and (or) damage to the product.

This product takes approximately **20 minutes** to assemble with **2 PEOPLE**.


The fittings pack contains **SMALL ITEMS** which should be **KEPT AWAY FROM YOUNG CHILDREN**.

Fittings and parts checklist


1	allen key	
2	bolts x 2	

Assembling the top cabinet

The top cabinet is fixed to these two cabinets.

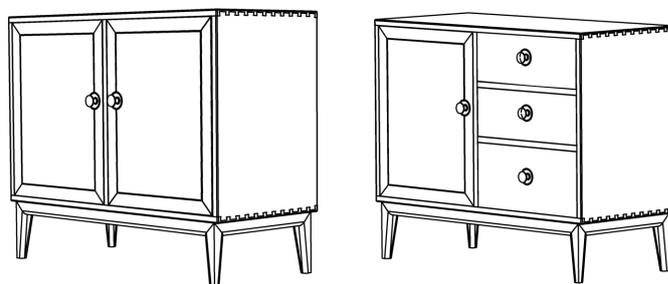


If you have the cabinet with drawers you will first need to remove the top drawer. To access the fixing point on the right.

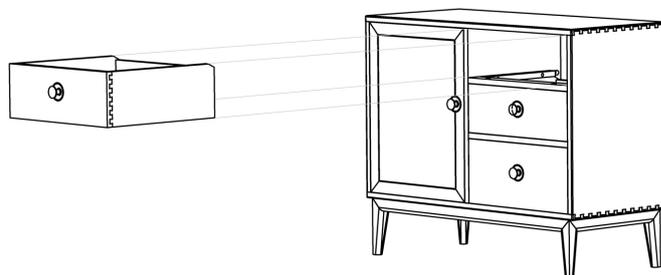



For the fixing point on the left and for the cabinet without drawers, the fixing points can be accessed by just opening the doors

Line up the top cabinet with the bottom cabinet.



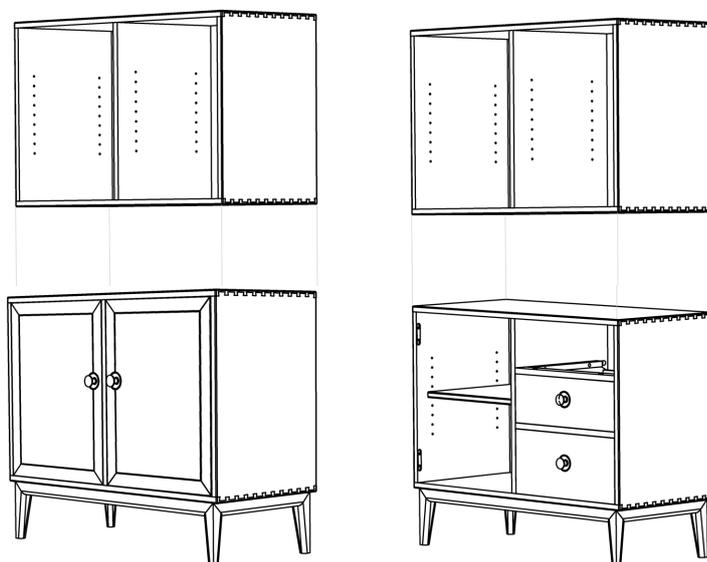


Step by step instructions

Inside of the cabinet you will find 2 holes in the top.






With the top and the bottom sections lined up you can now put the bolts provided through the bottom where they will locate with the thread in the bottom of the top cabinet. Do this for both the left and right and tighten with the allen key.

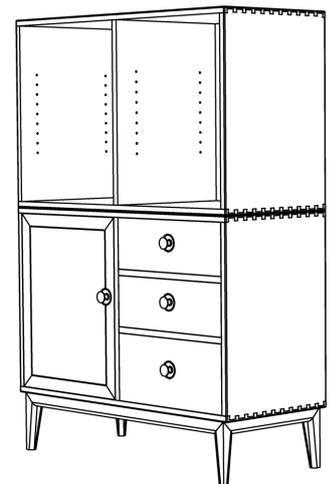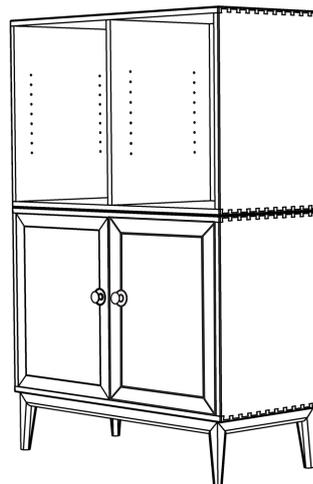

If you already have the bottom unit and have now purchased the top unit to go with it, you will need to drill out the fixing holes.

To do this place a piece of scrap wood on top of the cabinet where the hole will break through and the drill out the already counter bored hole from the inside of the cabinet.



Wall fixing instructions




Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Installation shall be carried out exactly according to the manufacturers instructions, otherwise a safety risk can occur if incorrectly installed. Cabinets and shelving over 600mm high can be unstable and should be supported until fixed to the wall.

WARNING: In order to prevent overturning this product must be used with the wall attachment device provided.

This item is heavy



Necessary Tools

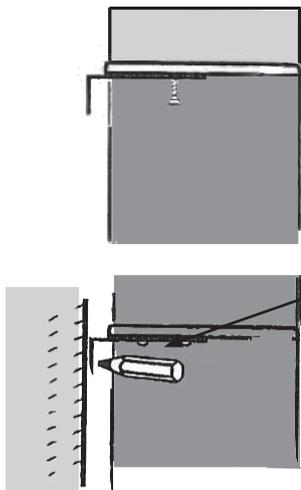


Slacken the two screws that hold each of the angled fixing plates and slide the plate back to touch the wall, then re-tighten the two screws.


Mark the wall with a pencil through the hole in the fixing plate

Move the unit away from the wall. Check for pipes and electrical cables before drilling into the wall.

Drill the wall for a fixing appropriate to your wall construction.

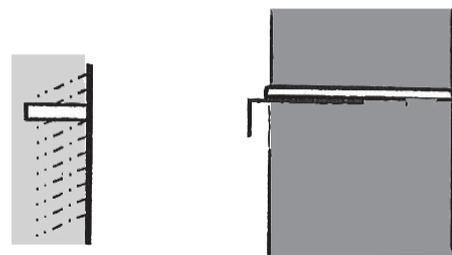

Place unit in its final position and make sure it is still level. Fix cabinet to the wall by screwing through the metal plate where applicable.



PLEASE KEEP THESE INSTRUCTIONS FOR FUTURE REFERENCE

Ercol Furniture Ltd, Summerleys Road, Princes Risborough, Buckinghamshire. HP27 9PX www.ercol.com